



4VGV25 250V

B22-G8 p



DATA SHEET

release. c - Revision 07-2014

Replace P04-23 p

Voltage	Frequency	Absorbed Power	Absorbed Current	Capacitor	Airflow	Rotation speed	Acoustic level	Rotation	Operational Temperature
V	Hz	W	A	µF	m³/h	RPM	dBA		Min/Max
230	50	63	0,28	2,0	1050	1395	52	L	-20°C / +60°C
230	60	72	0,32	2,0	1230	1620	55	L	-20°C / +70°C
230	50				618 CFM				-4°F / 140°F
230	60				723 CFM				-4°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

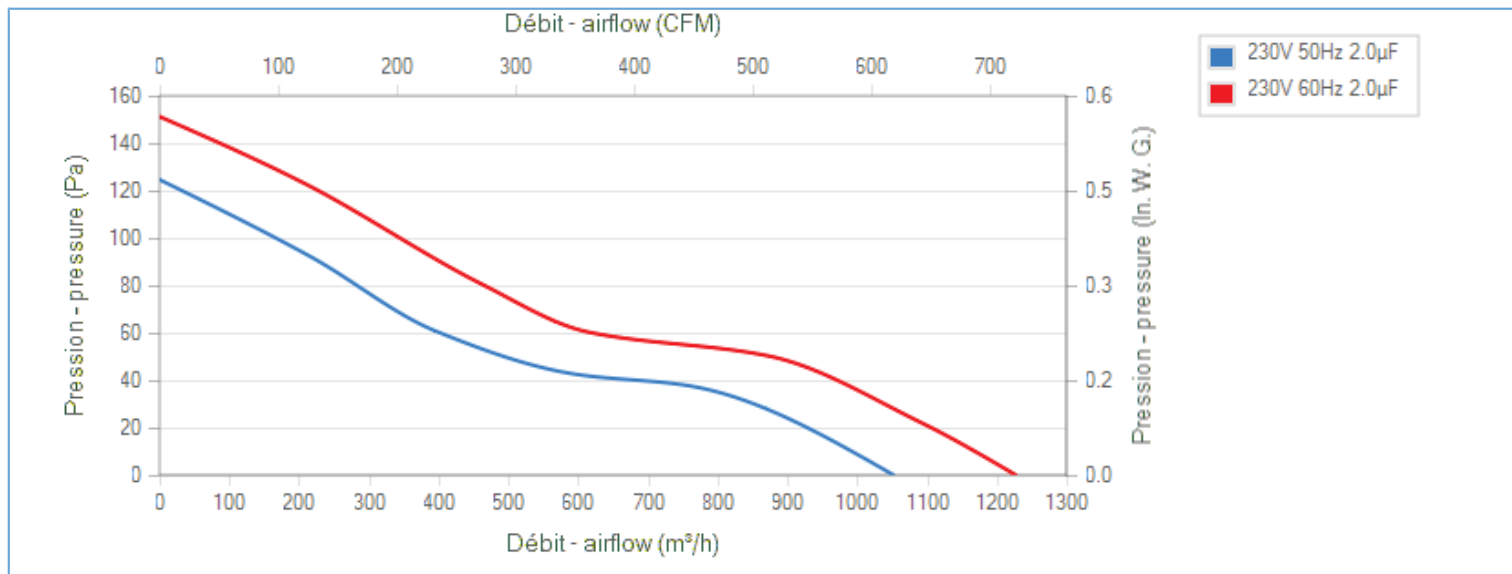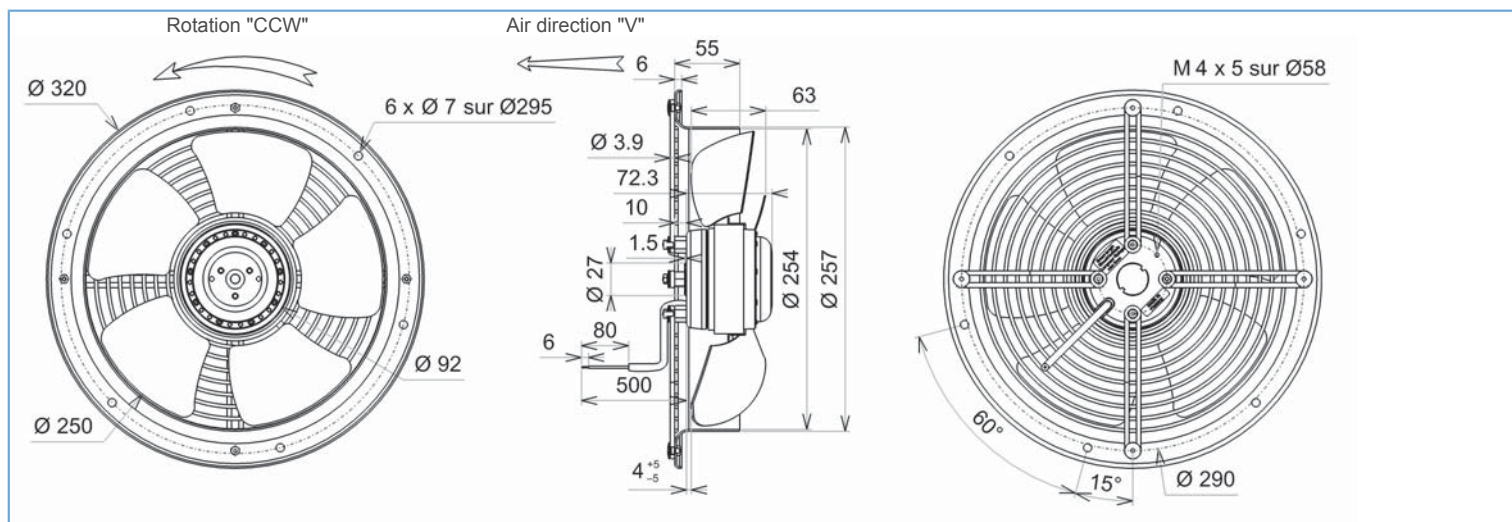

Tested with ECOFIT ring

Description

- .Weight : 3,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint
- .Finger guard and ring : black paint

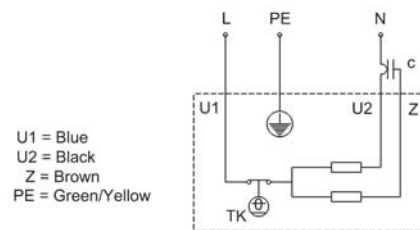



4VGV25 250V

B22-G8 p



DATA SHEET

release. c - Revision 07-2014

Replace P04-23 p

Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,065	kW ⁽¹⁾
Airflow	760	m ³ /h ⁽¹⁾
Pressure	38	Pa ⁽¹⁾
Rotation speed	1371	RPM ⁽¹⁾

(1) at optimal efficiency point

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point <125W

Accessories



Capacitor for 50Hz	19008
Capacitor for 60Hz	19008
Connecting box	39658
Connector	09172

Measurement setup

16085 VIROLE V250 RONDE

Documents

- Manuel d'utilisation www.ecofit.com/site/normes
- Operating and recycling manual www.ecofit.com/anglais/normes

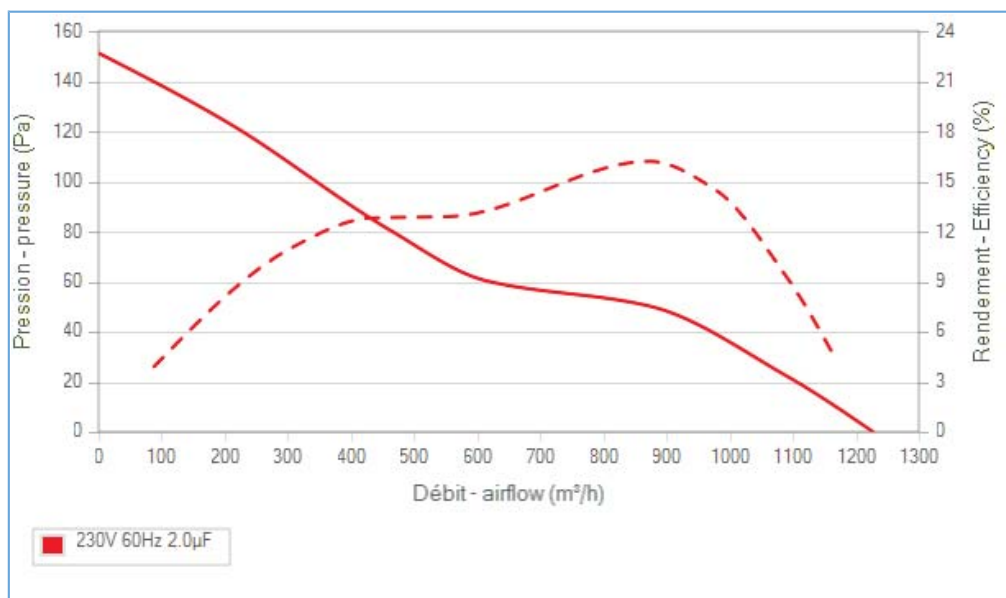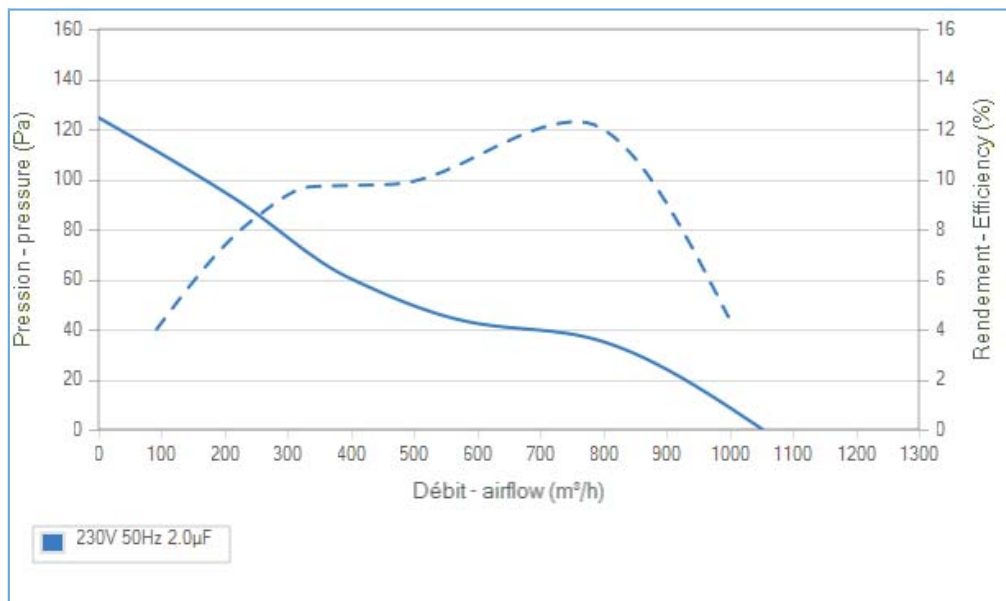

A041865
4RS925CN

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.