




- compact and space saving design
- 100% speed controllible through auto transformers
- Easy air volume control via large range of control products based on pressure and temperature
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
DRAD 281-4	3~460Y	60	A	2.20	3.60	1400	104	40	-	-	2.9	54	01.005	32
DRAD 281-4	3~230Δ	60	B	2.00	5.90	1310	104	40	-	-	2.9	54	01.006	32
DRAD 281-4	3~400D	50	C	1.90	3.60	1140	104	40	-	-	2.7	54	01.006	32

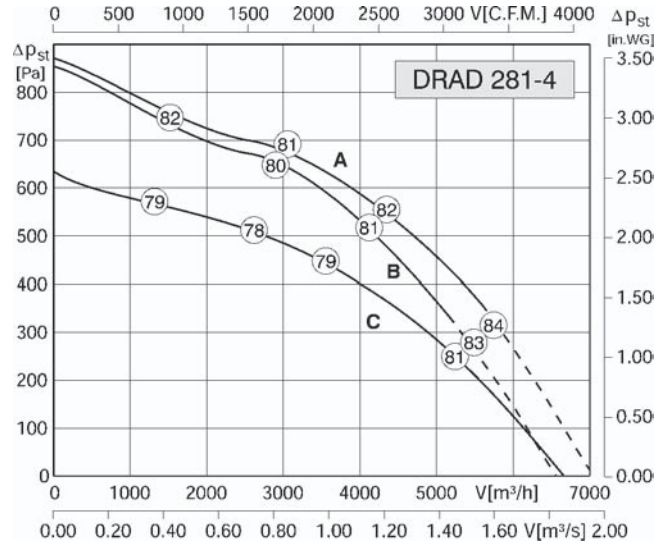