


- compact and space saving design
- 100% speed controllable through auto transformers
- Easy air volume control via large range of control products based on pressure and temperature
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	■ [kg]
DRAD 281-4	3~460Y	60	A	2.20	3.60	1400	104	40	-	-	2.9	54	01.005	32
DRAD 281-4	3~230Δ	60	B	2.00	5.90	1310	104	40	-	-	2.9	54	01.006	32
DRAD 281-4	3~400D	50	C	1.90	3.60	1140	104	40	-	-	2.7	54	01.006	32

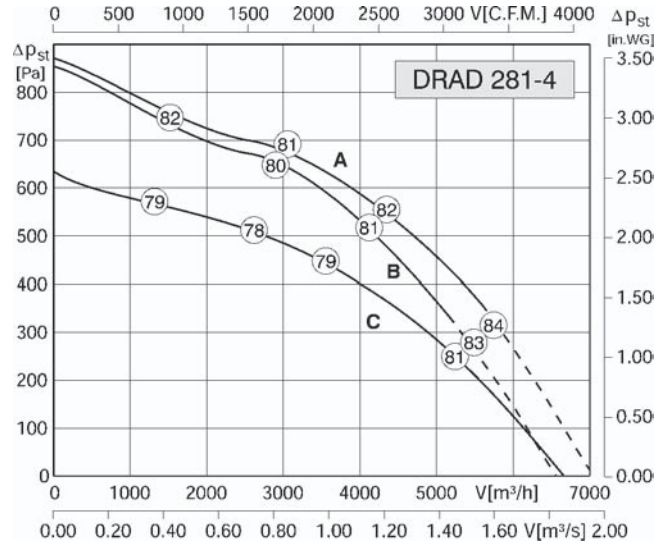