



**UNO\_G50-355-G.4FF (1x230V)**

07.08.2013

**Unobox**  
 With EC-motor

**Requested operating point**


Vol[cfm]	2001
dp[inWG]	0,05

**Operating data**

Vol[cfm]	2001
dp[inWG]	0,05
dp(dyn)[inWG]	0,02
n[%]	100
P[kW]	0,24
I[A]	1,42
n[1/min]	1498
eta[%]	0,0
Lw6[dBA]	76,0

**Nominal data**

Art.	F15-35502
U[V]	1~200-277
f[Hz]	50/60
P[kW]	0.35
I[A]	2.1@230V
n[1/min]	1500
C[μF]	--
tR[°C]	50
Pst min[Pa]	--
Delta I[%]	--
Ia/In	--
Weight [kg]	33
Connection	01.434

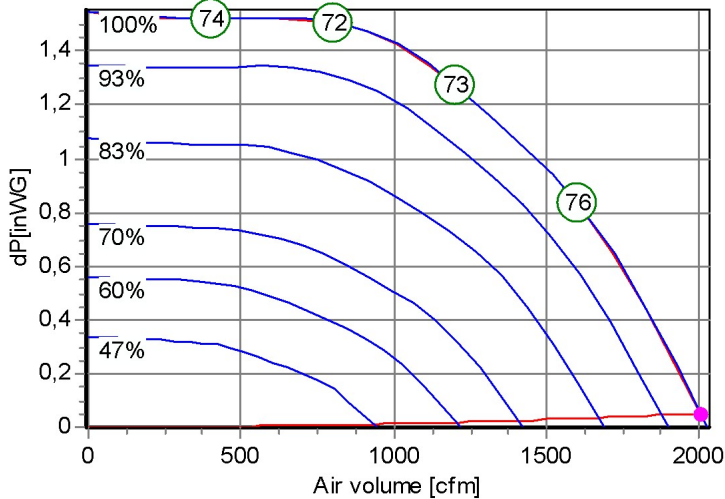

**Octaves [dBA]**

	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
LwA6	66	67	69	72	67	62	53	76,0
LwA5	58	67	72	65	63	60	53	73,0
LwA2	55	55	50	46	43	38	30	59,0

LwA6: Free outlet sound power level

LwA5: Free inlet sound power level

LwA2: Casing radiated sound power level