



UNO_G67-400-G.5FA (1x230V)

07.08.2013

Unobox
 With EC-motor

Requested operating point


Vol[cfm]	2988
dp[inWG]	0,06

Operating data

Vol[cfm]	2988
dp[inWG]	0,06
dp(dyn)[inWG]	0,01
n[%]	100
P[kW]	0,42
I[A]	2,56
n[1/min]	1493
eta[%]	0,0
Lw6[dBA]	78,9

Nominal data

Art.	F15-40002
U[V]	1~200-277
f[Hz]	50/60
P[kW]	0.62
I[A]	3.7@230V
n[1/min]	1500
C[μF]	--
tR[°C]	50
Pst min[Pa]	--
Delta I[%]	--
Ia/In	--
Weight [kg]	46
Connection	01.437

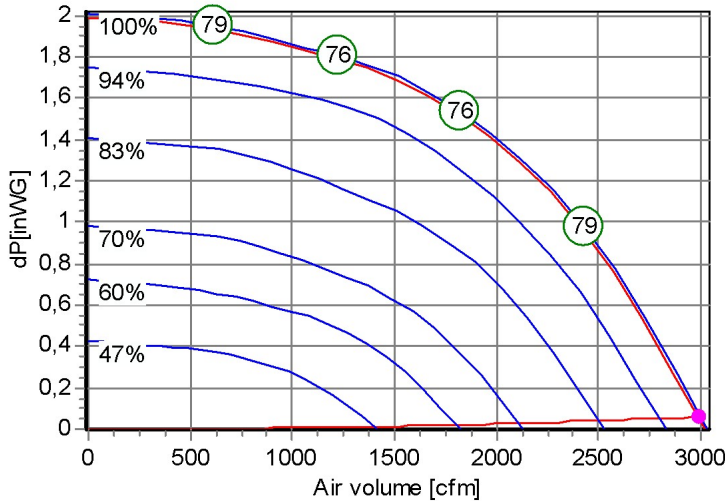

Octaves [dBA]

	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
LwA6	69	70	72	75	70	65	56	78,9
LwA5	61	70	75	68	66	63	56	75,9
LwA2	60	60	55	51	48	43	35	63,9

LwA6: Free outlet sound power level

LwA5: Free inlet sound power level

LwA2: Casing radiated sound power level